


Advanced WindWall® - 100kW (AWW) Patent # 9,062,654 B2


Max Output:		100kW @ 17mph
Performance:	Maximum Current	600A 60A 6A
	AC Voltage	180V 1,800V 18,000V
Physical:	Length x Width x Height (Measurements are in inches)	
	AWW	96x120x24
	Pole Segments	120x30
	Weight	4000lbs 1814kg
Operating Conditions:	Cut in Speed:	1.5mph / 0.67 m/s
	Max Speed:	140mph+ / 44.7 m/s
	Temperature:	375°F to -15°F 190°C to -25°C

Power Curve

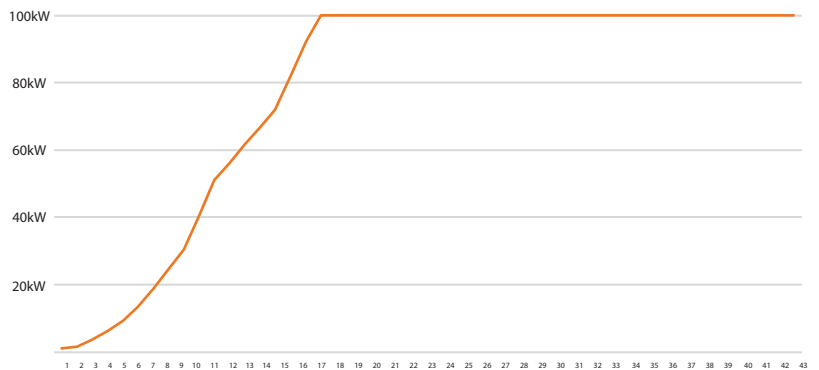

Advanced WindWall® - 100kW Power Curve

**NOTE: Due to the advanced ducting of the AWW, wind speed at the blade surface is up to 3X that of ambient wind speed. For example, this means at 10mph ambient wind speed, each blade of the AWW is experiencing 30mph+ wind speeds.*

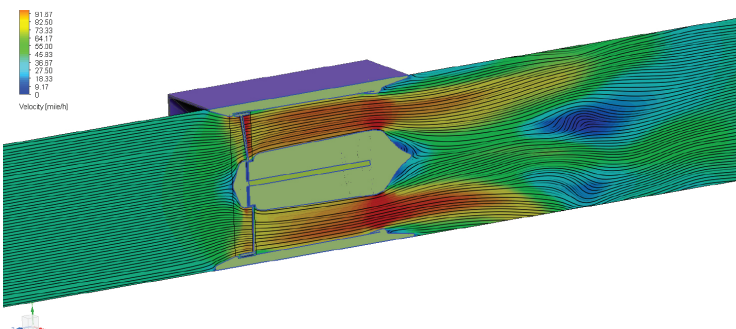

The Ducted Wind Turbine Difference

Because each MicroCube® ducts the wind and controls the windspeed, we are able to achieve much higher output at lower speeds than any of our competitors. The combination of our state-of-the-art blade system and unique generator, both of which use the windspeed and pressure of the air, create a near vacuum effect. This effect is vastly different from the traditional back pressure found in older systems. Our ducting increases ambient windspeed by a factor of 1.92X, as proven by the CFD analysis to the left.