




ⓘ 470 Blake Bottom Rd NW, Huntsville, AL 35806
 ☎ +1 (256) 217-5892
 🌐 www.americanwindinc.com



Advanced WindWall® - 18kW (AWW) Patent # 9,062,654 B2


Max Output:		18kW @ 22mph
Performance:	Maximum Current	300A 30A 6A
	AC Voltage	60V 600V 3,000V
Physical:	Length x Width x Height (Measurements are in inches)	
	AWW	78x82x24
	Pole Segments	120x30
Operating Conditions:	Weight	600lbs 272kg
	Cut in Speed:	1.5mph / 0.67 m/s
	Max Speed:	140mph+ / 44.7 m/s
	Temperature:	375°F to -15°F 190°C to -25°C

Power Curve

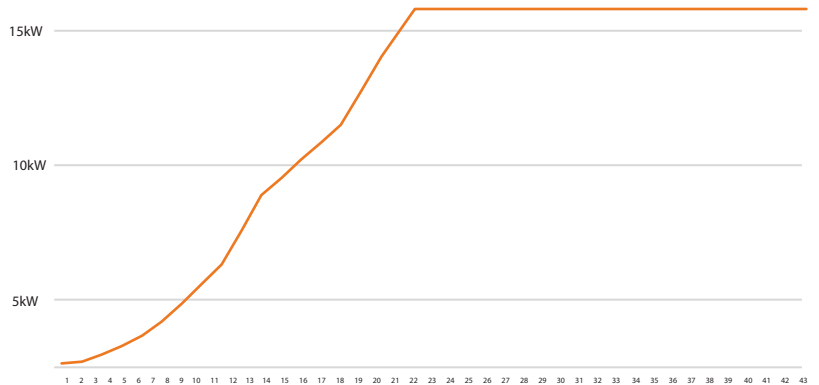

Advanced WindWall® - 18kW Power Curve

**NOTE: Due to the advanced ducting of the AWW, wind speed at the blade surface is up to 3X that of ambient wind speed. For example, this means at 10mph ambient wind speed, each blade of the AWW is experiencing 30mph+ wind speeds.*

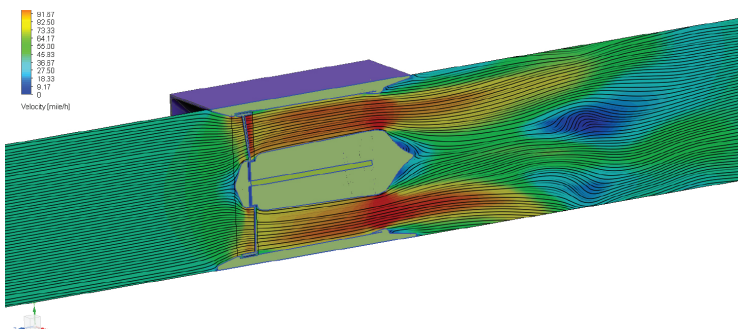

The Ducted Wind Turbine Difference

Because each MicroCube® ducts the wind and controls the windspeed, we are able to achieve much higher output at lower speeds than any of our competitors. The combination of our state-of-the-art blade system and unique generator, both of which use the windspeed and pressure of the air, create a near vacuum effect. This effect is vastly different from the traditional back pressure found in older systems. Our ducting increases ambient windspeed by a factor of 1.92X, as proven by the CFD analysis to the left.